











1. 芯 数/NO. of contacts

系 列/Series	303A	304A	305A	306A	307B	308A	312A	314B	319A
孔位排列/Pin Number									
适配线缆/Conductor size	0.75mm ²	0.75mm ²	0.75mm ²	0.75mm ²	0.75mm ²	0.75mm ²	0.25mm ²	0.25mm ²	0.25mm ²
导体直径/Pin size	1.5mm	1.5mm	1.5mm	1.5mm	1.5mm	1.5mm	1.0mm	1.0mm	1.0mm
额定电流/Rated current	7A	6A	6A	5A	5A	5A	3A	3A	3A
额定电压/Rated voltage	250V	250V	250V	250V	125V	60V	60V	60V	60V

4. 面板开孔/RECOMMENDED PANEL CUT-OUT





2. 编码原则/Part Number

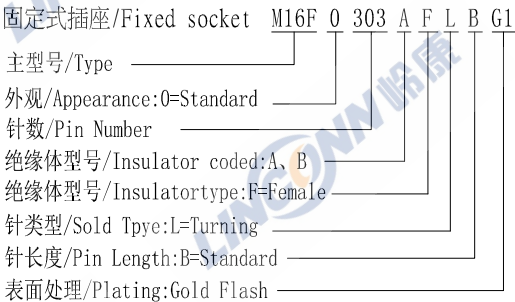

3. 技术特性/Technical Characteristics

- 寿命/Durability: >500 mate/unmate cycles
- Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
- 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
- 温度等级/Rated Temperature: -25° C, +80° C
- 盐雾/Corrosion Resistance: Salt spray test, >48h
- 防水等级/Waterproof: IP40

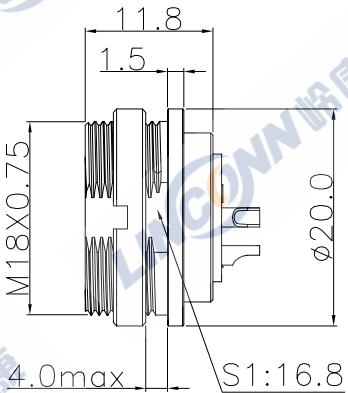

4	螺母/nut: 黄铜镀镍/Brass,Nickel plated		SCALE		TOLERANCES ARE:		TITLE:		
3	外壳/Outer Shell: 锌合金镀镍/ Zinc Alloy,Nickel plated		F		DECIMALES X± X±	ANGLES ±	固定式插座/Fixed socket		
2	母针芯/PIN: 磷铜镀金/Phosphor copper, G/F	SHEET	DIMENSION		APPROVALS		DATE	PART NO.	REV.
1	绝缘体/Insulator: PA BLACK	1 OF 1	MM		APPROVED:			M16F0303AFLBG1	*
序号ITEM	名称 & 规格/Name & Description	DWG NO.		REV.	CHECKED:			Linconn Elc Tech Co.,LTD	
					CHECKED:				
		M16F		A0	DRAWN: S.peng		07/05/2016		