

ECN	REV	DESCRIPTION	DATE	APPROVED


1. 芯 数/NO. of contacts

系 列/Series	303	304	305	306	308
孔位排列/Pin Number					
适配线缆/Conductor size	24AWG	24AWG	24AWG	26AWG	26AWG
导体直径/Pin size	1.0mm	1.0mm	1.0mm	0.7mm	0.6mm
额定电流/Rated current	3A	3A	3A	1A	1A
额定电压/Rated voltage	60V	30V	30V	30V	30V


2. 绝缘体型号/Insulator Coded

Coded	A	B
型号		

3. 面板开孔/RECOMMENDED PANEL CUT-OUT





4. 编码原则/Part Number

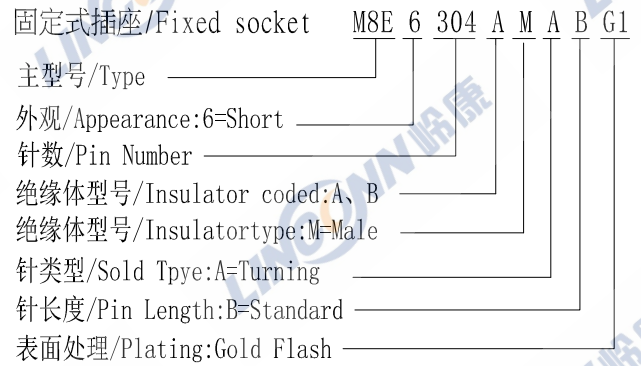

5. 技术特性/Technical Characteristics

1. 寿命/Durability: >1000 mate/unmate cycles
2. Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
3. 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
4. 温度等级/Rated Temperature: -25℃,+80℃
5. 盐雾/Corrosion Resistance: Salt spray test,>48h
6. 防水等级/Waterproof: IP67

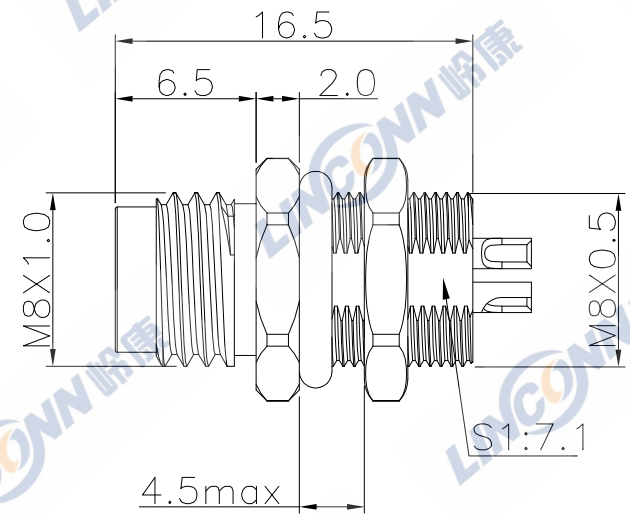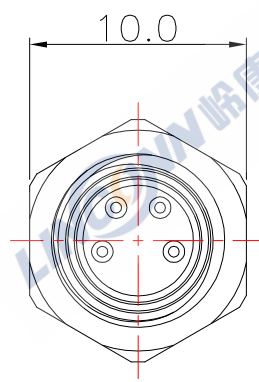

5	密封圈/O-RING: Rubber
4	六角螺母/Hexagonal nut: 黄铜镀镍/Brass, Nickel plated
3	外壳/Outer Shell: 黄铜镀镍/Brass, Nickel plated
2	公针芯/PIN: 黄铜镀金/Brass ,G/F
1	绝缘体/Insulator: PA BLACK
序号ITEM	名称 & 规格/Name & Description

		SCALE		TOLERANCES ARE: DECIMALES ANGLES ± · X ± 0.2 · XX ± 0.1		TITLE: 固定式插座/Fixed socket					
		F									
SHEET		DIMENSION		APPROVALS		DATE		PART NO. M8E6304AMABG1		REV. *	
1 OF 1		MM		APPROVED:				 <i>Linconn Elc Tech Co.,LTD</i>			
DWG NO.		REV.		CHECKED:							
M8E		A0		CHECKED:							
				DRAWN: S.peng		03/24/2014					