

ECN	REV	DESCRIPTION	DATE	APPROVED


1. 芯 数/NO. of contacts

系 列/Series	303	304
孔位排列/Pin Number		
适配线缆/Conductor size	26AWG	26AWG
导体直径/Pin size	0.5mm	0.5mm
额定电流/Rated current	1A	1A
额定电压/Rated voltage	60V	60V

2. 绝缘体型号/Insulator Coded



Coded	A
型号	


3. 编码原则/Part Number

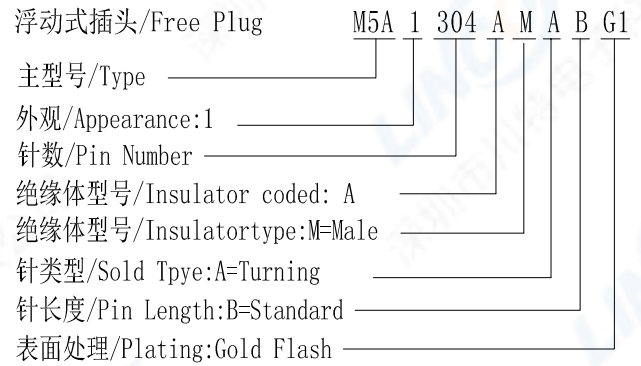

4. 技术特性/Technical Characteristics

- 1.寿命/Durability: >500 mate/unmate cycles
- 2.Pin接触电阻/ Pin Contact Resistance : ≤10 mΩ
- 3.绝缘电阻/Insulation Resistance : ≥ 100 MΩ
- 4.温度等级/Rated Temperature: -20℃,+80℃
- 5.盐雾/Corrosion Resistance: Salt spray test,>48h
- 6.防水等级/Waterproof: IP67

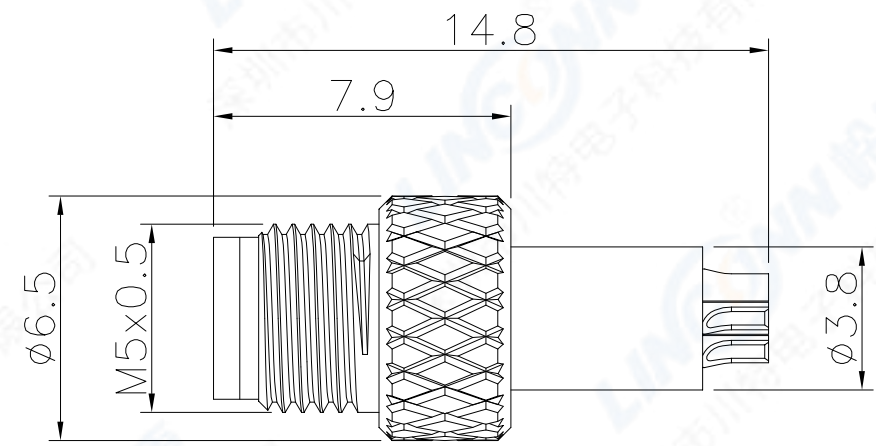

3	外壳/Outer Shell: 黄铜镀镍/Brass,Nickel plated		SCALE	TOLERANCES ARE: DECIMALES ANGLES · X ± 0.2 · XX ± 0.1		TITLE: 浮动式插头/Free Plug	
2	公针芯/PIN: 黄铜鍍金/Brass ,G/F		F			PART NO. M5A1304AMABG1	
1	绝缘体/Insulator: PA BLACK		DIMENSION	APPROVALS	DATE	REV. *	
序号ITEM	名称 & 规格/Name & Description	1 OF 1	MM	APPROVED:		LINCONN Linconn Elc Tech Co.,LTD	
			DWG NO.	CHECKED:			
			M5A	REV. A0	DRAWN: S.peng 03/24/2014		