

ECN	REV	DESCRIPTION	DATE	APPROVED


1. 芯 数/NO. of contacts

系 列/Series	303	304
孔位排列/Pin Number		
适配线缆/Conductor size	26AWG	26AWG
导体直径/Pin size	0.5mm	0.5mm
额定电流/Rated current	1A	1A
额定电压/Rated voltage	60V	60V


2. 绝缘体型号/Insulator Coded

Coded	A
型号	

3. 面板开孔/RECOMMENDED PANEL CUT-OUT





4. 编码原则/Part Number

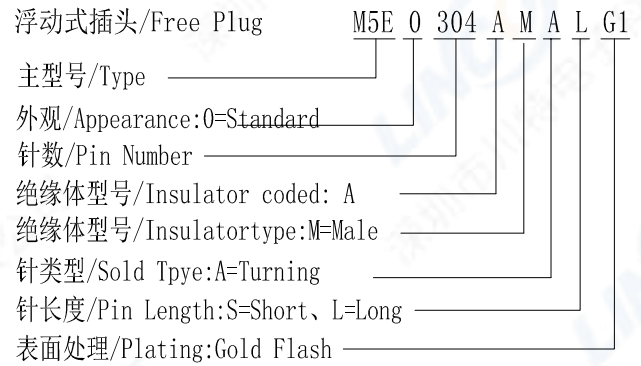

5.技术特性/Technical Characteristics

- 1.寿命/Durability: >500 mate/unmate cycles
- 2.Pin接触电阻/ Pin Contact Resistance : $\leq 10\text{ m}\Omega$
- 3.绝缘电阻/Insulation Resistance : $\geq 100\text{ M}\Omega$
- 4.温度等级/Rated Temperature: $-20^{\circ}\text{C}, +80^{\circ}\text{C}$
- 5.盐雾/Corrosion Resistance: Salt spray test, >48h
- 6.防水等级/Waterproof: IP67

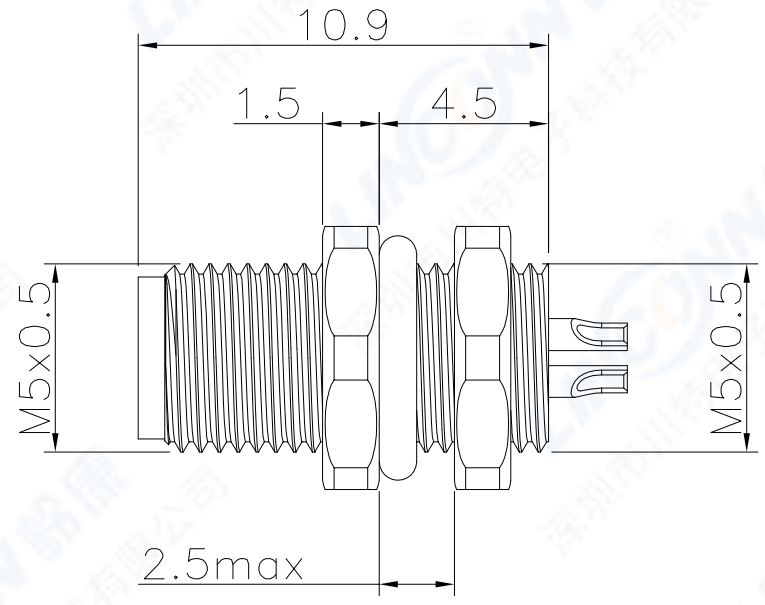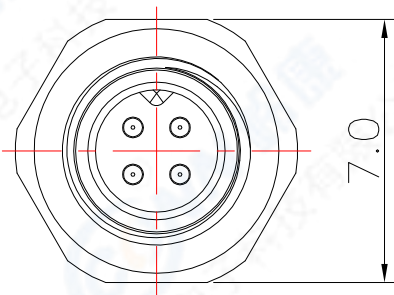

5	六角螺母/Hexagonal nut: 黄铜镀镍/Brass,Nickel plated
4	密封圈/O-RING: Rubber
3	外壳/Outer Shell: 黄铜镀镍/Brass,Nickel plated
2	公针芯/PIN: 黄铜镀金/Brass ,G/F
1	绝缘体/Insulator: PA BLACK
序号ITEM	名称 & 规格/Name & Description

	SCALE		TOLERANCES ARE: DECIMALES ANGLES · X ± 0.2 · XX ± 0.1 ±		TITLE: 固定式插座/Fixed socket	
	F					
SHEET	DIMENSION	APPROVALS	DATE		PART NO.	REV.
1 OF 1	MM	APPROVED:			M5E0304AMALG1	*
DWG NO.	REV.	CHECKED:			 <i>Linconn Elc Tech Co.,LTD</i>	
		CHECKED:				
M5E	A0	DRAWN: S.peng	03/24/2014			