


2. 绝缘体型号/Insulator Coded

Coded	A	B
型号		

3. 面板开孔/RECOMMENDED PANEL CUT-OUT



固定式插座/Fixed socket M8E 0 304 A F L L G1

主型号/Type _____

外观/Appearance:0=Standard _____

针数/Pin Number _____



绝缘体型号/Insulator coded:A、B _____

绝缘体型号/Insulator type:F=Female _____


针类型/Sold Tpye:L=Turning _____

针长度/Pin Length:S=Short、L=Long _____

表面处理/Plating:Gold Flash _____

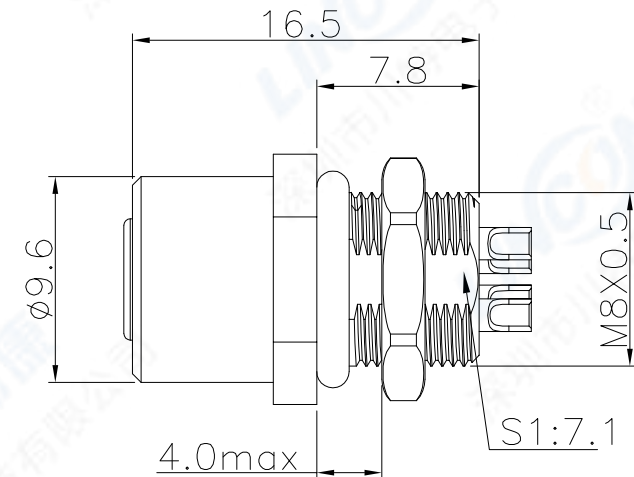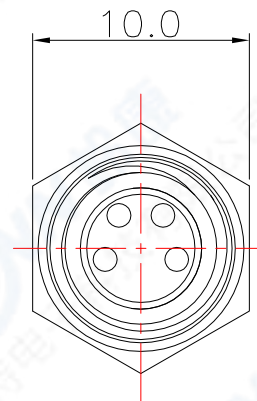

- 1.寿命/Durability: >1000 mate/unmate cycles
- 2.Pin接触电阻/ Pin Contact Resistance: $\leq 10 \text{ m}\Omega$
- 3.绝缘电阻/Insulation Resistance: $\geq 100 \text{ M}\Omega$
- 4.温度等级/Rated Temperature: $-25^{\circ}\text{C}, +80^{\circ}\text{C}$
- 5.盐雾/Corrosion Resistance: Salt spray test, >48h
- 6.防水等级/Waterproof: IP67

	SCALE		TOLERANCES ARE:	
	F		DECIMALES $\cdot X \pm 0.2$ $\cdot XX \pm 0.1$	ANGLES $\pm$
SHEET	DIMENSION		APPROVALS	DATE
1 OF 1	MM		APPROVED:	
DWG NO.		REV.	CHECKED:	
M8E		A0	CHECKED:	
			DRAWN: S.peng	03/24/2014

TITLE:	固定式插座/Fixed socket
--------	--------------------

PART NO.	REV.
M8E0304AFLLG1	*

LINCONN Linconn Elc Tech Co.,LTD