

ECN	REV	DESCRIPTION	DATE	APPROVED


1. 芯 数/NO. of contacts

系 列/Series	303	304	305	306	308
孔位排列/Pin Number					
适配线缆/Conductor size	24AWG	24AWG	24AWG	26AWG	26AWG
导体直径/Pin size	1.0mm	1.0mm	1.0mm	0.7mm	0.6mm
额定电流/Rated current	3A	3A	3A	1A	1A
额定电压/Rated voltage	60V	30V	30V	30V	30V


2. 绝缘体型号/Insulator Coded

Coded	A	B
型号		

3. 面板开孔/RECOMMENDED PANEL CUT-OUT





4. 编码原则/Part Number

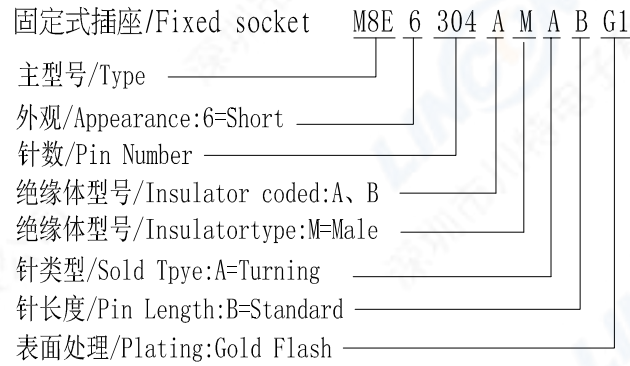

5.技术特性/Technical Characteristics

- 1.寿命/Durability: >1000 mate/unmate cycles
- 2.Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
- 3.绝缘电阻/Insulation Resistance: ≥ 100 MΩ
- 4.温度等级/Rated Temperature: -25℃,+80℃
- 5.盐雾/Corrosion Resistance: Salt spray test,>48h
- 6.防水等级/Waterproof: IP67

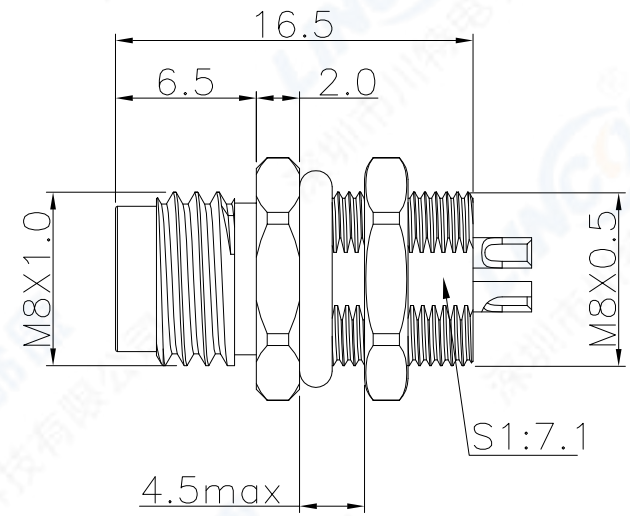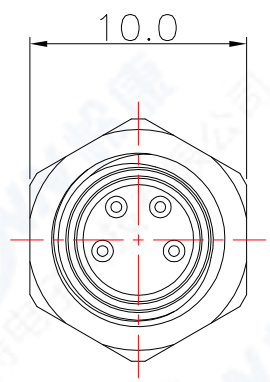

5	密封圈/O-RING: Rubber
4	六角螺母/Hexagonal nut: 黄铜镀镍/Brass,Nickel plated
3	外壳/Outer Shell: 黄铜镀镍/Brass,Nickel plated
2	公针芯/PIN: 黄铜鍍金/Brass ,G/F
1	绝缘体/Insulator: PA BLACK
序号ITEM	名称 & 规格/Name & Description

	SCALE	TOLERANCES ARE: DECIMALES ANGLES X ± 0.2 XX ± 0.1		TITLE: 固定式插座/Fixed socket	
	F				
SHEET	DIMENSION	APPROVALS		DATE	PART NO. M8E6304AMABG1
1 OF 1	MM	APPROVED:			REV. *
DWG NO.	REV.	CHECKED:			
M8E	A0	DRAWN: S.peng		03/24/2014	