


1. 芯 数/NO. of contacts



系 列/Series	302	303	304	305	307	308
孔位排列/Pin Number						
适配线缆/Conductor size	24AWG	24AWG	24AWG	24AWG	26AWG	26AWG
导体直径/Pin size	1.0mm	1.0mm	1.0mm	1.0mm	0.5mm	0.5mm
额定电流/Rated current	4A	4A	3A	3A	1A	1A
额定电压/Rated voltage	125V	125V	125V	125V	125V	125V

3. 编码原则/Part Number

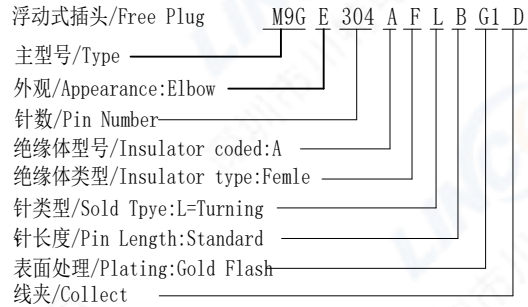

4. 技术特性/Technical Characteristics

- 寿命/Durability: >500 mate/unmate cycles
- Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
- 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
- 温度等级/Rated Temperature: -25° C,+80° C
- 盐雾/Corrosion Resistance: Salt spray test,≥48h
- 防水等级/Waterproof: IP67

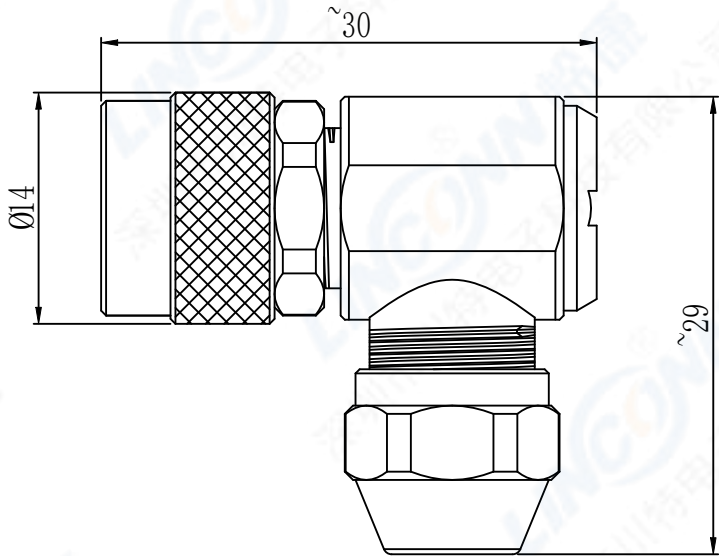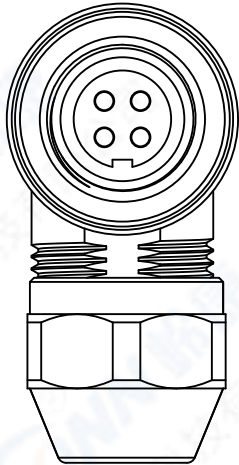

8	尾螺帽/Collect Nut: 黄铜镀镍/Brass,Nickel plated
7	线夹/Collect: PA BLACK
6	外壳/Outer Shell: 锌合金镀镍/ Zinc Alloy,Nickel plated
5	六角固定座/Hexagonal Screw: 黄铜镀镍/Brass,Nickel plated
4	密封圈/O-RING: Rubber
3	M9外壳/M9 Outer Shell: 黄铜镀镍/Brass,Nickel plated
2	绝缘体/Insulator: PA BLACK
1	母针芯/PIN: 磷铜镀金/Phosphor copper,G/F
序号 ITEM	名称 & 规格/Name & Description

	SCALE	TOLERANCES ARE:		TITLE: 浮动式插头/Free Plug	
	F	DECIMALES	ANGLES	PART NO. M9GE304AFLBG1D	
	SHEET	1 OF 1	DIMENSION	APPROVALS	REV.
	DWG NO.	M9G	REV.	APPROVED:	*
M9G		A0	CHECKED:	CHECKED:	
			DRAWN:	pengsen	06/08/2020