


ECN	REV	DESCRIPTION	DATE	APPROVED

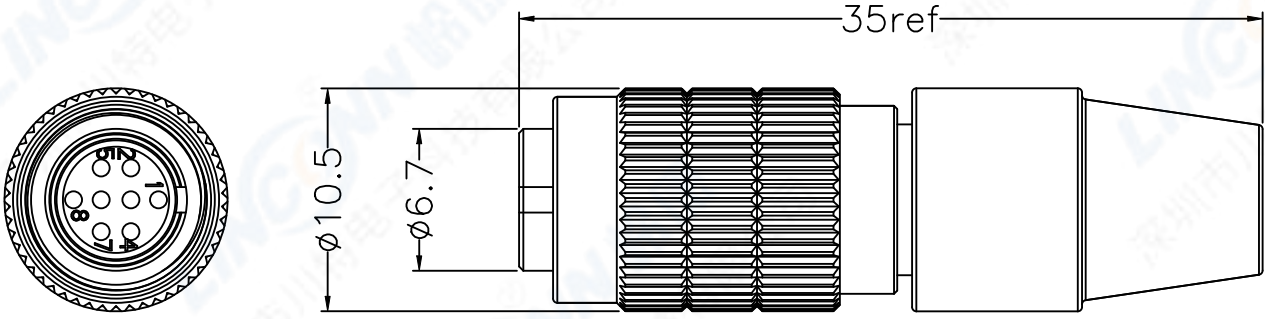

- Major Ratings
- 1. Withstand voltage: 100V AC for 1minute
 - 2. Current capacity: 1A
 - 3. Contact resistance: 30mΩ

Shell size	7 size		
Contact arrangement			
NO. of pins	4	6	8

Part number GL25-7TP-8S*

Model: Indicates the HR25 Series

Shell size: Indicates the outer diameter of the engaging portion of the Plug

Classification of lock mechanism: Indicated as described below

T: Screw lock system No symbol: Push-pull lock system

Classification of shell P: Plug J: Jack R: Receptacle

Number of contacts

Form of contacts: As described below

P: Male contacts S: Female contacts


Type of contacts: The wiring system used or the type of contacts are classified in alphabetical order:

Example None: Solder termination

C: Crimp-style contacts

A: PCB dip termination


8	护套/Bushing: PTU Black
7	线夹/Collet: 黄铜Brass
6	螺丝/Screw: 黄铜镀镍/Brass Nickel Plated
5	母针/Female pin: 磷铜镀金/Phosphor copper, gold plated
4	绝缘体/Insulator: PA66+GF, Black
3	固定环/Retaining ring : 黄铜镀镍/Brass Nickel Plated
2	外壳/Body: 黄铜镀镍/Brass Nickel Plated
1	外壳/Shell: 黄铜镀镍/Brass Nickel Plated
ITEM	SPECIFICATION



SCALE	TOLERANCES ARE:	ANGLES	
F	DECIMALES · X ± 0.3 · XX ± 0.15	±	
SHEET	DIMENSION	APPROVALS	DATE
1 OF 1	MM	APPROVED:	
DWG NO.	REV.	CHECKED:	
GL25	A0	CHECKED:	
		DRAWN:	

TITLE: Plug(Solder type)

PART NO.	REV.
GL25-7TP-8S	*

 Linconn Elc Tech Co.,LTD