


ECN	REV	DESCRIPTION	DATE	APPROVED

1. 编码原则/Part Number

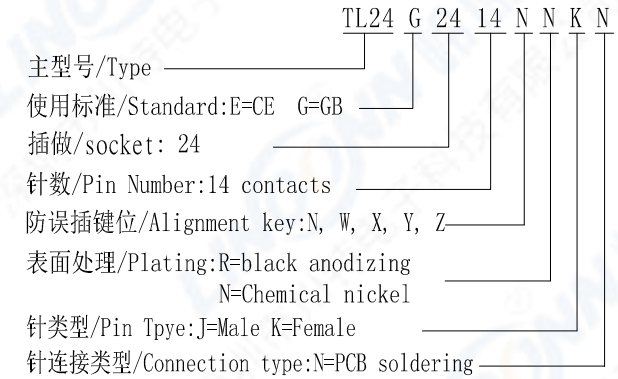




2.技术特性/Technical Characteristics

- 寿命/Durability: >500 mate/unmate cycles
- Pin接触电阻/ Pin Contact Resistance : ≤10 mΩ
- 绝缘电阻/Insulation Resistance : ≥ 100 MΩ
- 温度等级/Rated Temperature: -25℃,+80℃
- 盐雾/Corrosion Resistance: Salt spray test,>48h

3.防误插键位/Alignment key

Part numbers	GB/国标	EN/欧标				
	N	N	W	X	Y	Z
10 contacts	95°	95°	85°	105°	75°	115°
14 contacts	95°	95°	85°	105°	75°	115°
22 contacts		80°	70°	90°	60°	100°

4. 面板开孔/RECOMMENDED PANEL CUT-OUT

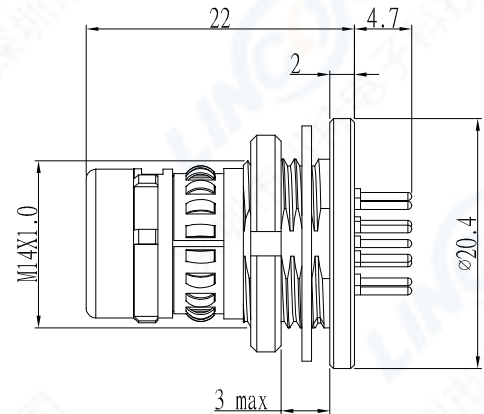

	SCALE		TOLERANCES ARE: DECIMALES · X ± 0.2 · XX ± 0.1		ANGLES ±		TITLE: 固定式插座/Fixed socket	
	F							
SHEET	DIMENSION		APPROVALS		DATE		PART NO.	REV.
1 OF 1	MM		APPROVED:				TL24G2414NNKN	*
DWG NO.		REV.	CHECKED:				 <i>Linconn Elc Tech Co.,LTD</i>	
			CHECKED:					
TL24		A0	DRAWN: pengsen		09/03/2020			