

ECN	REV	DESCRIPTION	DATE	APPROVED

1. 芯 数/NO. of contacts

系 列/Series	0802	0804	0807	0809
孔位排列/Pin Number				
导体直径/Pin size	1.5mm	1.02mm	0.8mm	0.8mm
额定电流/Rated current	13A	7.5A	3A	2A
额定电压/Rated voltage	300V	300V	200V	200V

2. 编码原则/Part Number

固定式插座/Fixed socket YL H 26 N 08 07 K 21-ø6

主型号/Type _____

焊接式/Pin Sold Type _____

屏蔽型/Shield Type Plug _____

表面处理/Plating:chemical nickel-plating _____



外壳型号/Shell Size:08、10、12、14 _____

针数/Pin Number _____

针类别/Pin Type:K=Female J=Male _____

夹线类型/Collect Type: 21 _____

护套/Bend relief _____

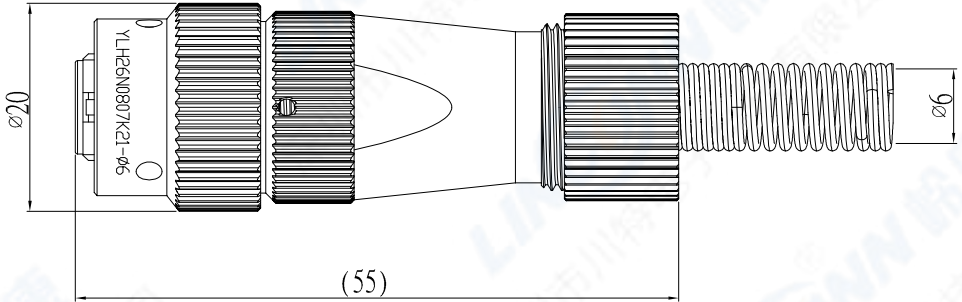

技术特性/Technical Characteristics

- 1. 寿命/Durability: >500 mate/unmate cycles
- 2. Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
- 3. 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
- 4. 温度等级/Rated Temperature: -25° C, +80° C

	SCALE	TOLERANCES ARE: DECIMALES ANGLES X ± 0.2 .XX+ 0.1 ±	TITLE: 浮动式插头/Free Plug	
	F			
SHEET	DIMENSION	APPROVALS	DATE	PART NO. YLH26N0807K21-ø6
1 OF 1	MM	APPROVED:		REV. *
DWG NO.	REV.	CHECKED:		Linconn Elc Tech Co.,LTD
YL	A0	DRAWN: pengsen	07/24/2020	