
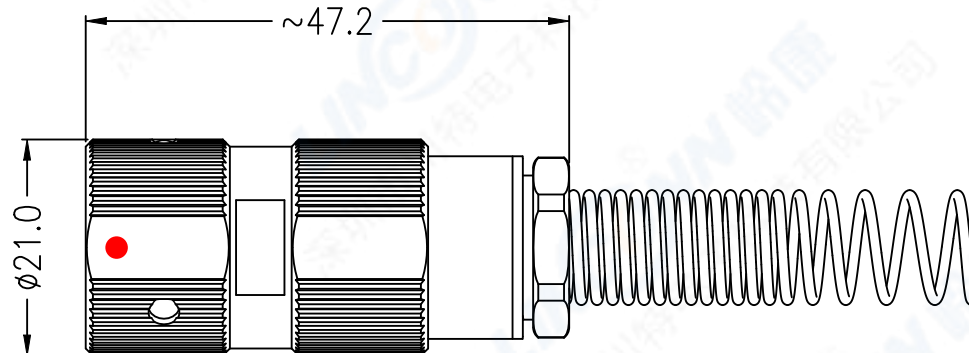


浮动式插头/Free plug	WKTK-15	P-5	P	-C	N
系列号/Series name	_____	_____	_____	_____	_____
壳体尺寸/Shell size	_____	_____	_____	_____	_____
壳体类型/Shell type: P=Plug	_____	_____	_____	_____	_____
芯数/Number of contacts: 5 contact	_____	_____	_____	_____	_____
针类型/Type of terminal: P=Male	_____	_____	_____	_____	_____
壳体表面处理/Shell plating: C=Natural chrome	_____	_____	_____	_____	_____
		K=Black chrome			
弹簧/Spring: N=Natural color		B=Black			

1. 寿命/Durability: >100 mate/unmate cycles
2. Rated current & voltage: 0.5A & 60V
3. Pin接触电阻/ Pin Contact Resistance: $\leq 50 \text{ m}\Omega$
4. 绝缘电阻/Insulation Resistance: $\geq 5000 \text{ M}\Omega$
5. 温度等级/Rated Temperature: -25°C , $+85^{\circ}\text{C}$
6. 防水等级/Waterproof: IP67



10	尾帽/CABLE NUT: 铝合金/ANODIZING
9	弹簧/SPRING: 钢/STEEL
8	垫片/WASHER: 不锈钢/SUS
7	防水塞/RUBBER CASE: 硅胶/SILICON RUBBER
6	螺帽/NUT ADAPTOR: 铝合金/ANODIZING
5	塑胶环/PLASTIC SLEEVE: 铁氟龙/PTFE
4	公针芯/PIN: 黄铜镀金/BRASS, GOLD PLATED
3	绝缘体/INSULATOR: PA66+GF Black
2	外壳/OUTER SHELL: 黄铜镀铬/BRASS, CHROME PLATED BLACK
1	密封圈/O-RING: 橡胶/RUBBER
序号ITEM	名称 & 规格/Name & DESCRIPTION

	SCALE		TOLERANCES ARE:		TITLE: 5Pin PLUG	
	F		DECIMALES x± · x±	ANGLES ±		
	SHEET	DIMENSION	APPROVALS	DATE	PART NO. WTK-15P-5P-CN	REV. *
	1 OF 1	MM	APPROVED:			
	DWG NO.	REV.	CHECKED:			
U229/U		A0	CHECKED:		 Linconn Elc Tech Co.,LTD	
		DRAWN:	pengsne 07/18/2020			