

编码原则/Part Number

浮动式插头/Free plug WKTK-15 P-6 P -C N

系列号/Series name

壳体尺寸/Shell size

壳体类型/Shell type: P=Plug

芯数/Number of contacts: 6 contact



针类型/Type of terminal: P=Male

壳体表面处理/Shell plating: C=Natural chrome
K=Black chrome

弹簧/Spring: N=Natural color B=Black

技术特性/Technical Characteristics

- 寿命/Durability: >100 mate/unmate cycles
- Rated current & voltage: 0.5A & 60V
- Pin接触电阻/ Pin Contact Resistance: $\leq 50\text{ m}\Omega$
- 绝缘电阻/Insulation Resistance: $\geq 5000\text{ M}\Omega$
- 温度等级/Rated Temperature: -25°C , $+85^{\circ}\text{C}$
- 防水等级/Waterproof: IP67

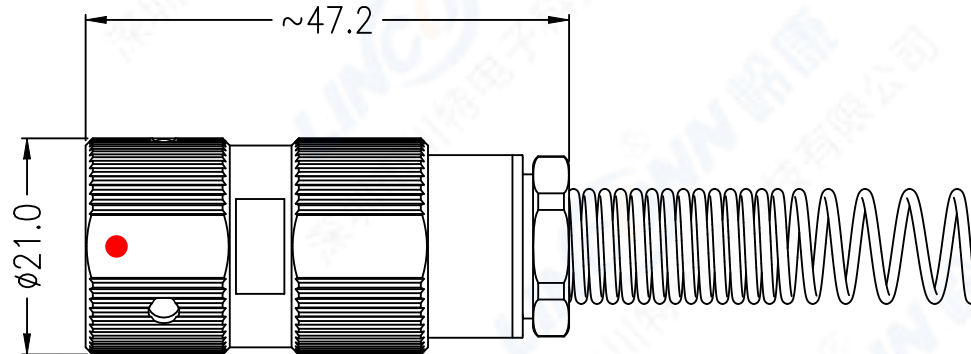

10 尾帽/CABLE NUT: 铝合金/ANODIZING

9 弹簧/SPRING: 钢/STEEL

8 垫片/WASHER: 不锈钢钢/SUS

7 防水塞/RUBBER CASE: 硅胶/SILICON RUBBER

6 螺帽/NUT ADAPTOR: 铝合金/ANODIZING

5 塑胶环/PLASTIC SLEEVE: 铁氟龙/PTFE


4 公针芯/PIN: 黄铜镀金/BRASS, GOLD PLATED

3 绝缘体/INSULATOR: PA66+GF Black

2 外壳/OUTER SHELL: 黄铜镀铬/BRASS, CHROME PLATED BLACK

1 密封圈/O-RING: 橡胶/RUBBER

序号ITEM 名称 & 规格/Name & DESCRIPTION



SCALE
F

TOLERANCES ARE:
DECIMALES
X±
X±

ANGLES
±

TITLE:
6Pin PLUG

PART NO. WKTK-15P-6P-CN REV. *

LINCONN Linconn Elc Tech Co.,LTD

SHEET 1 OF 1
DWG NO. B329
DIMENSION MM
REV. A0

APPROVALS
APPROVED:
CHECKED:
CHECKED:
DRAWN: pengsne 07/18/2020