

浮动式插座/Free sockets WKTK-15 RF-5 S -C

系列号/Series name _____

壳体尺寸/Shell size _____




壳体类型/Shell type: R=Receptacle _____

芯数/Number of contacts: 5 contact _____

针类型/Type of terminal: S=Female _____

壳体表面处理/Shell plating: C=Natural chrome
K=Black chrome _____

1. 寿命/Durability: >100 mate/unmate cycles
2. Rated current & voltage: 0.5A & 60V
3. Pin接触电阻/ Pin Contact Resistance: $\leq 50 \text{ m}\Omega$
4. 绝缘电阻/Insulation Resistance: $\geq 5000 \text{ M}\Omega$
5. 温度等级/Rated Temperature: -25°C , $+85^{\circ}\text{C}$
6. 防水等级/Waterproof: IP67

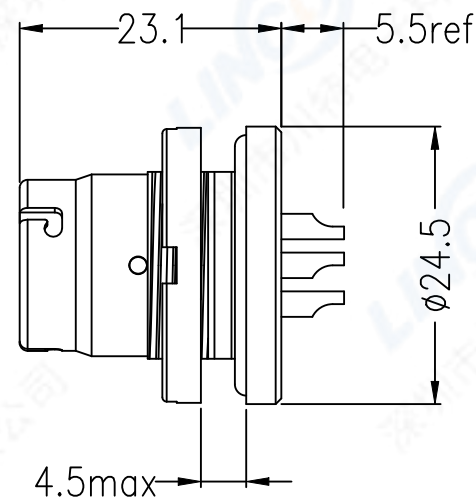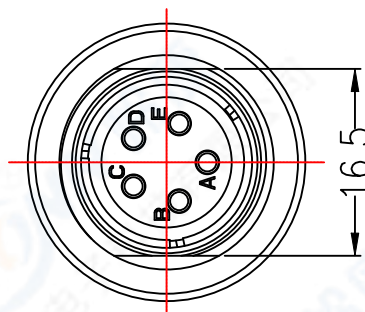

5	开槽螺母/NOTCHED NUT: 黄铜镀铬/BRASS, CHROME PLATED BLACK
4	母针芯/PIN: 黄铜镀金/BRASS, GOLD PLATED
3	绝缘体/INSULATOR: PA66+GF Black
2	外壳/OUTER SHELL: 黄铜镀铬/BRASS, CHROME PLATED BLACK
1	密封圈/O-RING: 橡胶/RUBBER
序号ITEM	名称 & 规格/Name & DESCRIPTION

	SCALE	TOLERANCES ARE:		TITLE:	5Pin socket
	F	DECIMALES X ± · X ±	ANGLES ±		
SHEET	DIMENSION	APPROVALS	DATE	PART NO.	REV.
1 OF 1	MM	APPROVED:		WKTk-15RF-5S-C	*
DWG NO.	REV.	CHECKED:			
U183/U	AO	CHECKED:			
		DRAWN:	pengsne 07/18/2020	 Linconn Elc Tech Co.,LTD	