

编码原则/Part Number

浮动式插座/Free sockets WTK-15 RE-6 S -C

系列号/Series name

壳体尺寸/Shell size

壳体类型/Shell type: R=Receptacle

芯数/Number of contacts: 6 contact





针类型/Type of terminal: S=Female

壳体表面处理/Shell plating: C=Natural chrome
K=Black chrome

技术特性/Technical Characteristics

1. 寿命/Durability: >100 mate/unmate cycles
2. Rated current & voltage: 0.5A & 60V
3. Pin接触电阻/ Pin Contact Resistance: ≤50 mΩ
4. 绝缘电阻/Insulation Resistance: ≥ 5000 MΩ
5. 温度等级/Rated Temperature: -25° C, +85° C
6. 防水等级/Waterproof: IP67

面板开孔/RECOMMENDED PANEL CUT-OUT

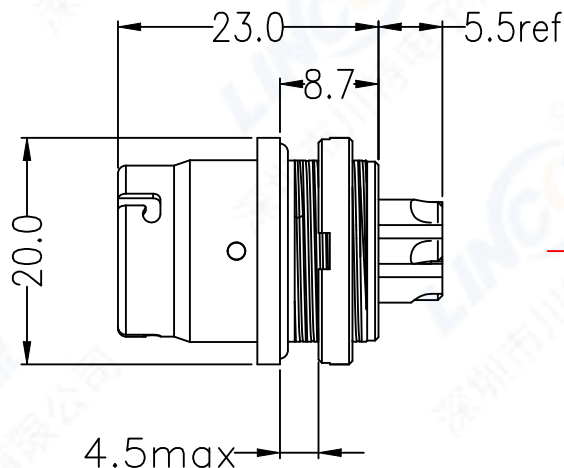

5 开槽螺母/NOTCHED NUT: 黄铜镀铬/BRASS, CHROME PLATED BLACK


4 母针芯/PIN: 黄铜镀金/BRASS, GOLD PLATED

3 绝缘体/INSULATOR: PA66+GF Black

2 外壳/OUTER SHELL: 黄铜镀铬/BRASS, CHROME PLATED BLACK

1 密封圈/O-RING: 橡胶/RUBBER

序号ITEM 名称 & 规格/Name & DESCRIPTION



SCALE

F

TOLERANCES ARE:

DECIMALES
X±
X±

ANGLES
±

SHEET

1 OF 1

DIMENSION

MM

DWG NO.

B284

REV.

A0

APPROVALS

APPROVED:

CHECKED:

CHECKED:

DRAWN:

pengsne

DATE

07/18/2020

TITLE:

6Pin socket

PART NO.

WTK-15RE-6S-C

REV.

*



Linconn Elc Tech Co.,LTD