


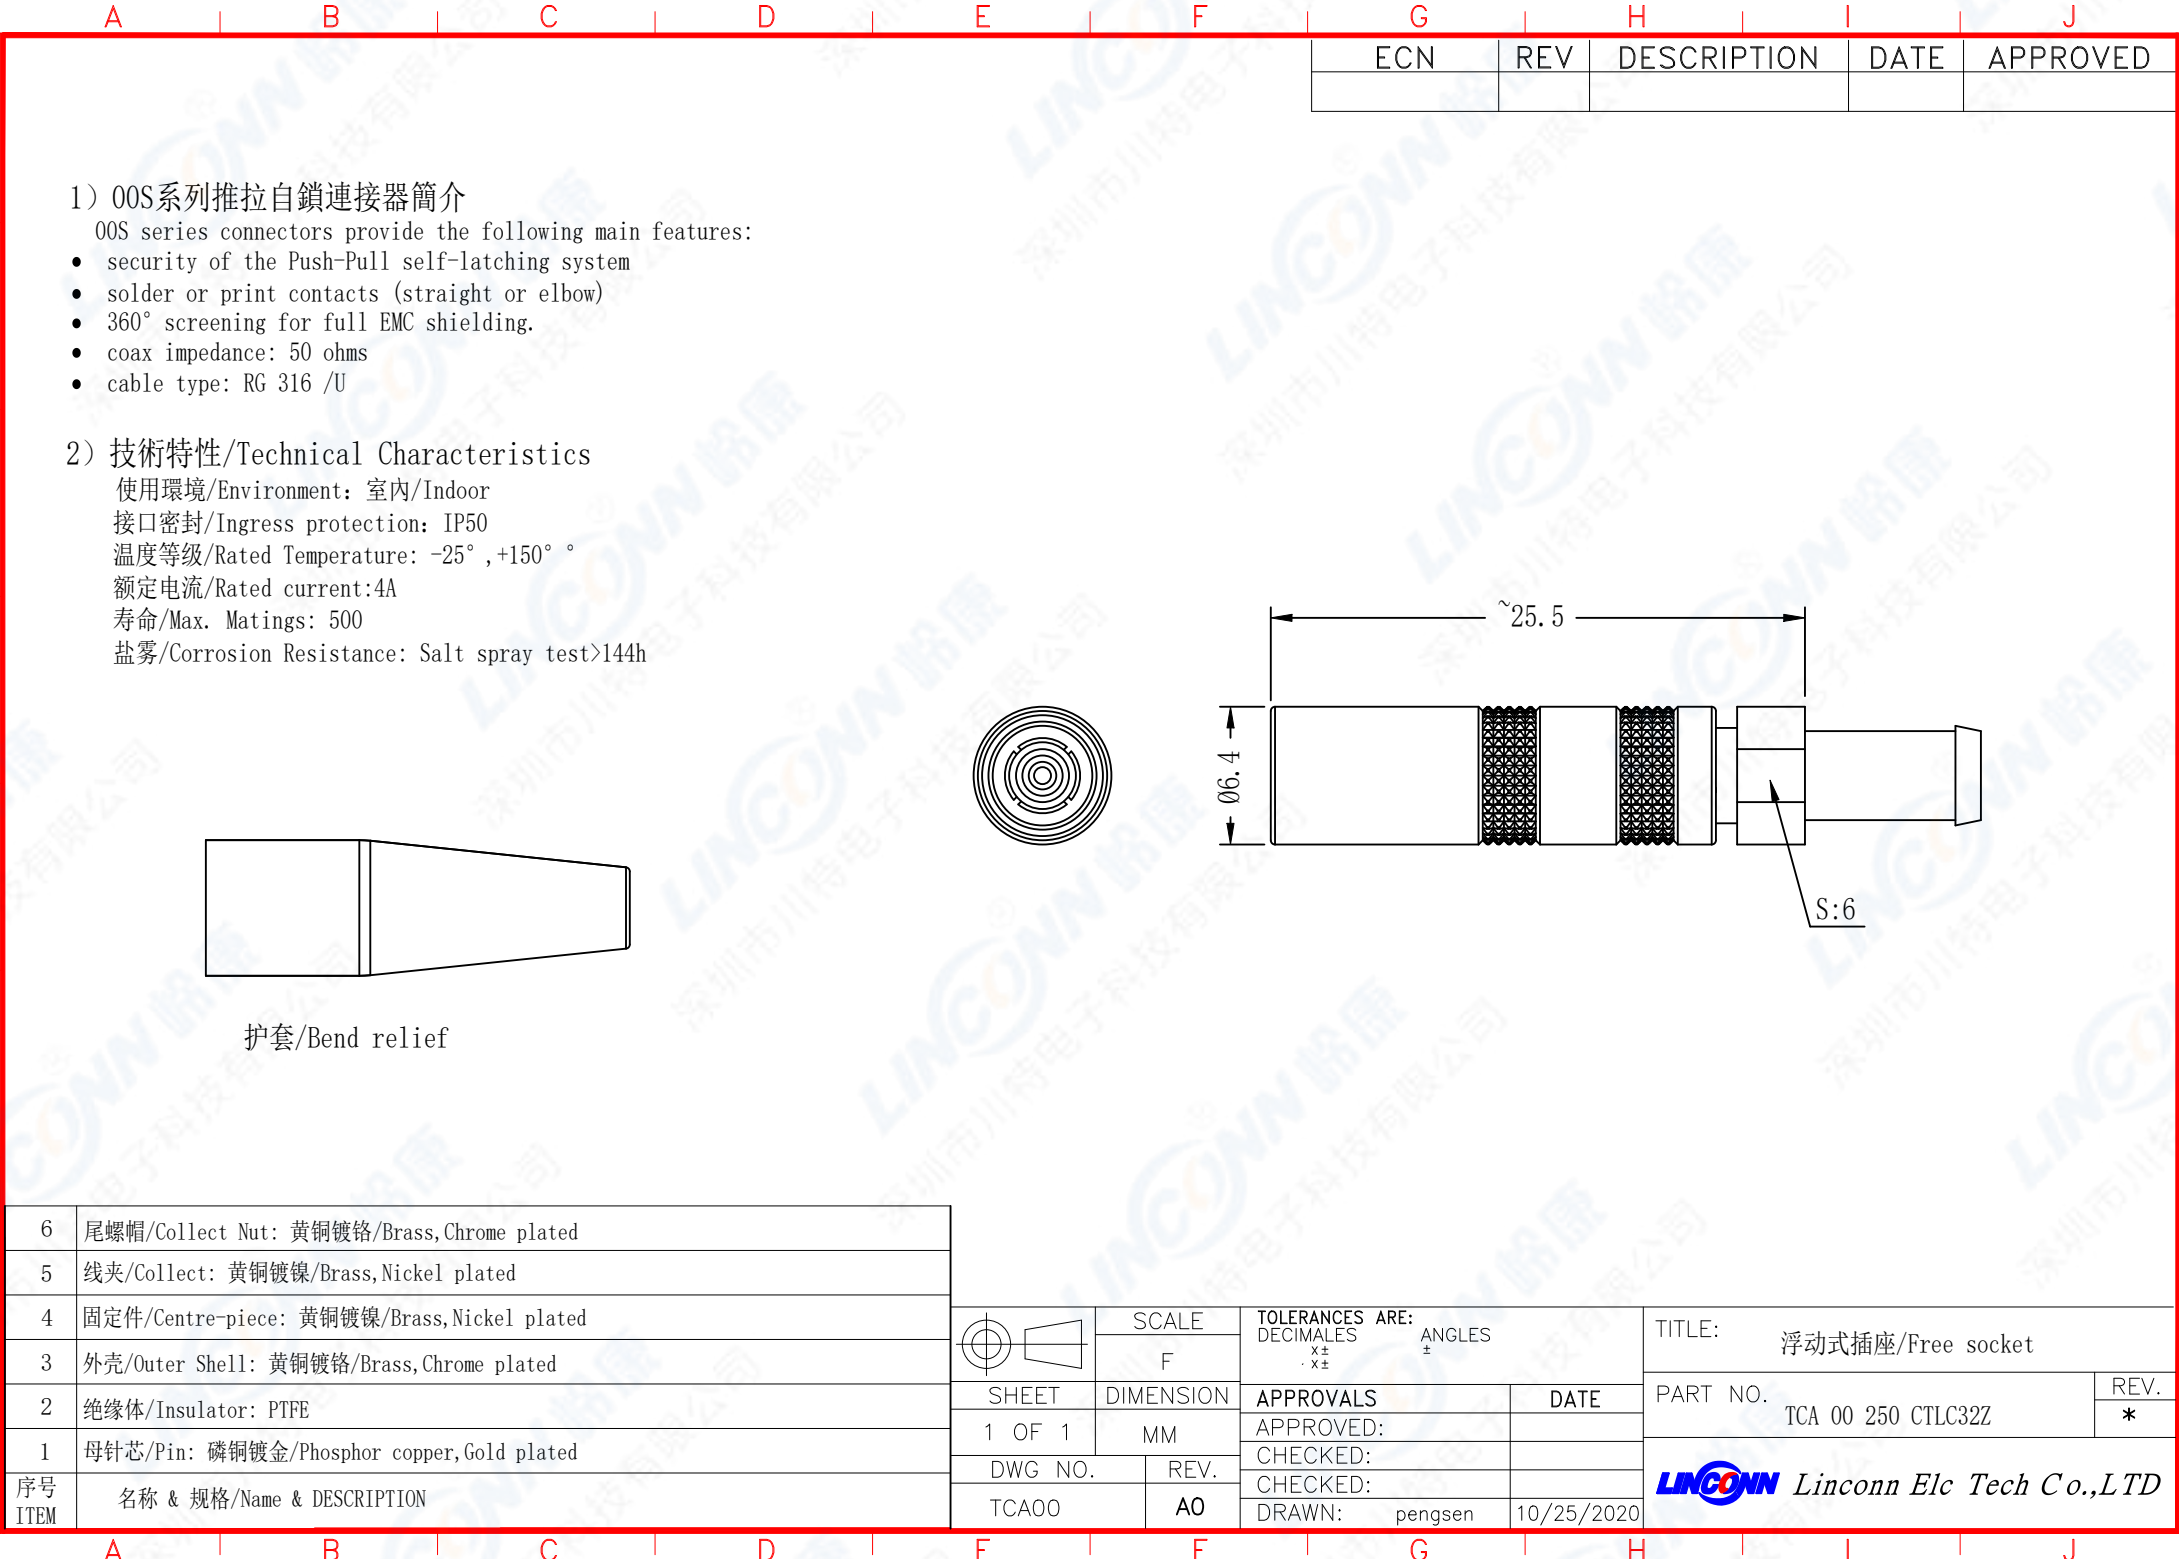


1) 00S系列推拉自鎖連接器簡介

00S series connectors provide the following main features:

- security of the Push-Pull self-latching system
- solder or print contacts (straight or elbow)
- 360° screening for full EMC shielding.
- coax impedance: 50 ohms
- cable type: RG 316 /U

2) 技術特性/Technical Characteristics

使用環境/Environment: 室內/Indoor
接口密封/Ingress protection: IP50
溫度等級/Rated Temperature: -25° ,+150° °
額定電流/Rated current:4A
壽命/Max. Matings: 500
鹽霧/Corrosion Resistance: Salt spray test>144h

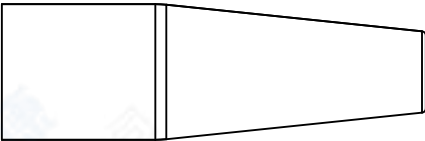

护套/Bend relief

6	尾螺帽/Collect Nut: 黃銅鍍鉻/Brass,Chrome plated
5	線夾/Collect: 黃銅鍍鎳/Brass,Nickel plated
4	固定件/Centre-piece: 黃銅鍍鎳/Brass,Nickel plated
3	外壳/Outer Shell: 黃銅鍍鉻/Brass,Chrome plated
2	绝缘体/Insulator: PTFE
1	母针芯/Pin: 磷銅鍍金/Phosphor copper,Gold plated
序号 ITEM	名称 & 规格/Name & DESCRIPTION

	SCALE	TOLERANCES ARE: DECIMALES $\begin{smallmatrix} x \pm \\ . x \pm \end{smallmatrix}$ ANGLES $\begin{smallmatrix} \pm \end{smallmatrix}$		TITLE: 浮动式插座/Free socket	
	F				
SHEET	DIMENSION	APPROVALS	DATE	PART NO. TCA 00 250 CTLC32Z	REV.
1 OF 1	MM	APPROVED:			*
DWG NO.	REV.	CHECKED:		Linconn Elc Tech Co.,LTD	
TCA00	A0	CHECKED:			
		DRAWN: pengsen	10/25/2020		
				PART NO. TCA 00 250 CTLC32Z	
				REV. *	
Linconn Elc Tech Co.,LTD					