

ECN	REV	DESCRIPTION	DATE	APPROVED

编码原则/Part Number

浮动式插座/Free sockets WTK-15 RF-6 S -C

系列号/Series name _____

壳体尺寸/Shell size _____

壳体类型/Shell type: R=Receptacle _____

芯数/Number of contacts: 6 contact _____





针类型/Type of terminal: S=Female _____

壳体表面处理/Shell plating:C=Natural chrome
K=Black chrome _____

技术特性/Technical Characteristics

- 1. 寿命/Durability: >100 mate/unmate cycles
- 2. Rated current & voltage: 0.5A & 60V
- 3. Pin接触电阻/ Pin Contact Resistance: ≤50 mΩ
- 4. 绝缘电阻/Insulation Resistance: ≥ 5000 MΩ
- 5. 温度等级/Rated Temperature: -25° C, +85° C
- 6. 防水等级/Waterproof: IP67

面板开孔/RECOMMENDED PANEL CUT-OUT

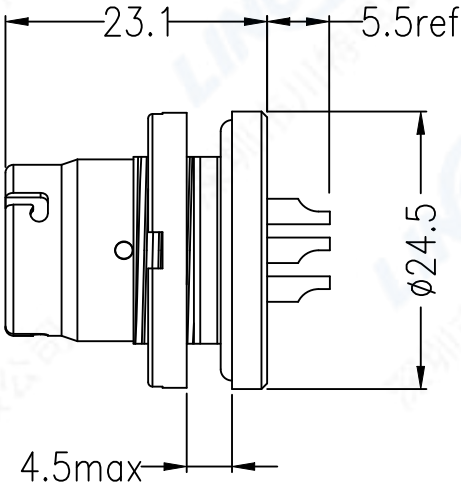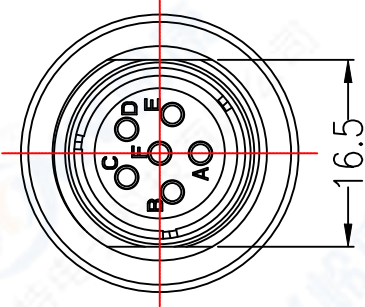

5	开槽螺母/NOTCHED NUT: 黄铜镀铬/BRASS, CHROME PLATED BLACK
4	母针芯/PIN: 黄铜镀金/BRASS, GOLD PLATED
3	绝缘体/INSULATOR: PA66+GF Black
2	外壳/OUTER SHELL: 黄铜镀铬/BRASS, CHROME PLATED BLACK
1	密封圈/O-RING: 橡胶/RUBBER
序号ITEM	名称 & 规格/Name & DESCRIPTION

	SCALE
	F
SHEET	DIMENSION
1 OF 1	MM
DWG NO.	REV.
U283	A0

TOLERANCES ARE:	
DECIMALES X± X±	ANGLES ±
APPROVALS	DATE
APPROVED:	
CHECKED:	
CHECKED:	
DRAWN:	pengsne 07/18/2020

TITLE: 6Pin socket	
PART NO. WTK-15RF-6S-C	REV. *
Linconn Elc Tech Co.,LTD	